PT8420 Heavy Industrial • 4..20mA / 0..20mA

Absolute Linear Position to 60 inches (1524 mm) Aluminum or Stainless Steel Enclosure Options VLS Option To Prevent Free-Release Damage IP68 / NEMA 6 • Hazardous Area Certification

GENERAL

Full Stroke Range Options	0-2 to 0-60 inches
Output Signal Options	420 mA (2-wire) and 020 mA (3-wire)
Accuracy	see ordering information
Repeatability	± 0.05% full stroke
Resolution	essentially infinite
Measuring Cable Options	stainless steel or thermoplastic
Enclosure Material	powder-painted aluminum or stainless steel
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	see ordering information
Maximum Retraction Accel	eration see ordering information

ELECTRICAL

Input Voltage	see orderii	ng information
Input Current		20 mA max.
Maximum Loop Resista	nce (Load) (loop supply vo	ltage - 8)/0.020
Circuit Protection		38 mA max.
Impedance	100M ohms@	0100 VDC, min.
Signal Adjust, Zero	from factory set zero to 50% of fu	Ill stroke range
Signal Adjust, Span	to 50% of fa	actory set span
Thermal Effects, Zero	0.0	1% f.s./°F, max.
Thermal Effects, Span	0.0	1% f.s./°F, max.

EMC COMPLIANCE PER DIRECTIVE 89/336/EEC

Emission/Immunity

EN50081-2 / EN50082-2

(6

€₽∘


ENVIRONMENTAL

Enclosure	NEMA 4/4X/6, IP 67/68
Hazardous Area Certification	see ordering information
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g's to 2000 Hz maximum
Weight, Aluminum (Stainless Steel) E	nclosure 3 lbs. (6 lbs.) max.

20630 Plummer Street • Chatsworth, CA 91311 tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799






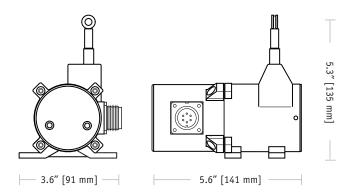

The PT8420 with its 4-20 mA feedback signal, is ideal for monitoring the stroke of a hydraulic cylinder and other applications requiring position data acquistion in harsh environments.

As a member of our family of NEMA 4-rated cable-extension transducers, the PT8420 provides a feedback signal that is proportional to the linear movement of a traveling stainless-steel extension cable. Simply mount the body of the transducer to a fixed surface and attach the extension cable to the moving object.


Output Signal:




*Optional 3-wire, 0...20mA output signal available.

www.sensorway.cn • sales@sensorway.cn

Outline Drawing:

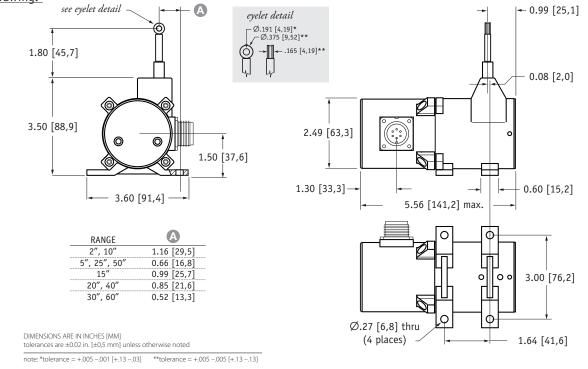

Ordering Information:



Sample Model Number:

PT8420 - 0030 - 111 - 1110

 range: enclosure/cable tension: measuring cable: output signal: electrical connection: cable guide option: 	30 inches aluminum/standard (13 oz.) .034 nylon-coated stainless 420mA, 2-wire 6-pin plastic connector standard nylon cable guide
---	--

Full Stroke Range:

©_order code:	0002	0005	0010	0015	0020	0025	0030	0040	0050	0060
full stroke range, min:	2 in.	5 in.	10 in.	15 in.	20 in.	25 in.	30 in.	40 in.	50 in.	60 in.
accuracy (% of f.s.):	0.28%	0.28%	0.18%	0.18%	0.18%	0.18%	0.18%	0.15%	0.15%	0.15%
potentiometer cycle life*:	2.5 x 10 ⁶	2.5 x 10 ⁶	5 x 10 ⁵	2.5 x 10 ⁵	2.5 x 10 ⁵	2.5 x 10 ⁵				

*-I cycle is defined as the travel of the measuring cable from full retraction to full extension and back to full retraction

Enclosure Material and Measuring Cable Tension:

		,										
A order code:	1		5	2	3	e	6	4	8	7	,	9
enclosure:		alum	ninum			303 sta	ainless			316 sta	ainless	
cable tension:	stand	dard me	dium	high	standard	med	ium	high	standard	med	ium	high
max. acceleration:	15	g 2	5 g	40 g	бg	12	g	18 g	6 g	12	g	18 g
		Range:	2 in.	5 in.	10 in.	15 in.	20 in.	25 in.	30 in.	40 in.	50 in.	60 in.
	C	Standard:	39 oz.	16 oz.	39 oz.	26 oz.	20 oz.	16 oz.	13 oz.	20 oz.	16 oz.	13 oz.
cable tension option	~	Medium:	65 oz.	26 oz.	65 oz.	43 oz.	33 oz.	26 oz.	22 oz.	33 oz.	26 oz.	22 oz.
specifications	U	High:	116 oz.	47 oz.	116 oz.	77 oz.	60 oz.	47 oz.	40 oz.	60 oz.	47 oz.	40 oz.

tension tolerance: ± 50%

<u>celesco</u>

www.sensorway.cn . sales@sensorway.cn

tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799


Ordering Information (cont.):

Measuring Cable:

measuring Cable:							
B _order code:	1		2	3		4	
	Ø.034-inch nylo stainless st		47-inch non-coated stainless steel	Ø.062-inch thermoplastic		Ø.031-inch non-coated stainless steel	
	available in all	ranges 5, 15, 20), 25, 30-inch ranges only	all ranges up to 30	inches only 4	0, 50, 60-inch ranges only	
Output Signals:							
B order code:	1	2	3	4	5*	6*	
output signal options:	420 mA	204 mA	020 mA	200 mA 420		204 mA	
	4 20	20 4	0 20	20 0	4 20	20 4	
sensitivity:	16 mA/full st	troke ±0.25%	20 mA/full stro	ke ±0.25%	16 mA/full stroke ±0.25%		
wiring configuration:	2 -	wire	3 – wi	re	2 – wire		
input voltage: hazardous area certification:	8 - 3	4 vdc not ce	: 14 – 29 rtified	vdc	14 – 32 vdc CSA • Cenelec		
	<i>Example:</i> ordercode = 1	= 420 mA	8		Hazardous Area	(Ex)	
		Ĺ	💭 = 4 mA) = 20 mA	Class 1 Groups A, B, C	LCIE EEx and D ia IIc T4	


*IMPORTANT: intrinsically safe when powered from a CSA certified zener barrier rated 28 VDC max, 110 mA max per installation drawing#677984

Electrical Connection:

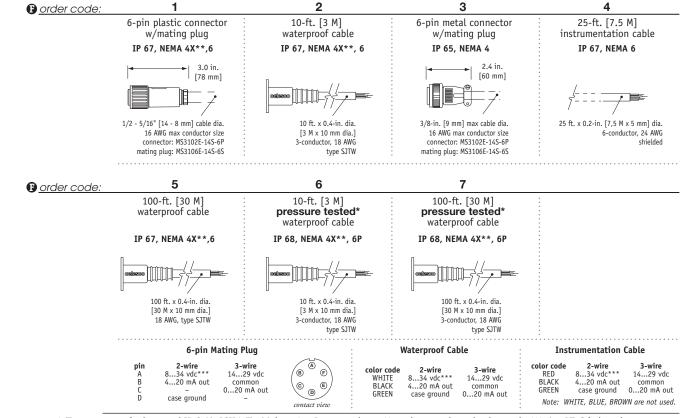


*-Test pressure: 100 feet [30 meters] H2O (40 PSID) Test Medium: Air; Duration: 2 hours. ** -applies to stainless steel enclosure only. ***14-32 VDC for hazardous area option.

Cable Guide Options:

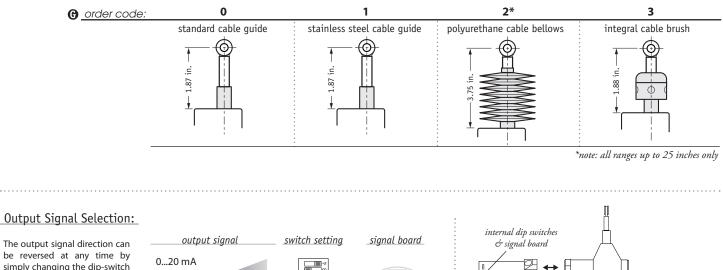

be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.

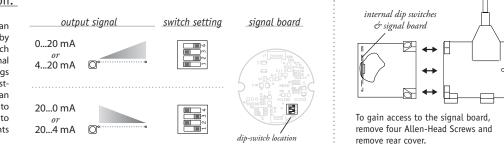


VLS Option - Free Release Protection

The patented Celesco Velocity Limiting System (VLS) is an option for PT8000 Series cable extension transducers that limits cable retraction to a safe 40 to 55 inches per second.

The VLS option prevents the measuring cable from ever reaching a damaging velocity during an accidental free release. This option is ideal for mobile applications that require frequent cable disconnection and reconnection. It prevents expensive unscheduled downtime due to accidental cable mishandling or attachment failure.

VLS is NOT available for medium and high cable tension options or 2, 5 and 15-inch stroke ranges.

北京赛斯维测控技术有限公司 北京市朝阳区望京西路48号 金隅国际C座1002 电话: +86 010 8477 5646 传真: +86 010 5894 9029 邮箱: <u>sales@sensorway.cn</u> http://www.sensorway.cn How To Configure Model Number for VLS Option:

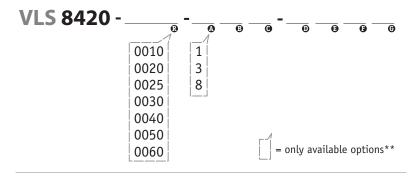

creating VLS model number (example):

1. select PT8420 model	PT8420-0060-111-1110
2. remove "PT" from the model numbe	r 🕅 8420-0060-111-1110
3. add "VLS"	VLS + 8420-0060-111-1110
4. completed model number !	VLS8420-0060-111-1110

**Note: please contact factory for a solution to options not supported.

version: 10.0 last updated: May 21, 2013

tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799 now part of Measurement Specialties, Inc.

CEESCO www.sensorway.cn • sales@sensorway.cn